

# SH260




**Stump Hog**  
**Grinds Stumps**  
**Quickly and Efficiently**



# Technical Specifications

GENERAL	
Model	SH 260
Hydraulics HP	70-100 HP
Fillow/PSI	30-45@3000-4750psi
Wheel Diameter Thickness	26"/3 3/4"
Work Zone	70" W x 24" D
Ground Clearance	15"
Telescoping	12"
Weight	1640 lbs.
Dimensions	63"L x 60"W
Number of Teeth	32

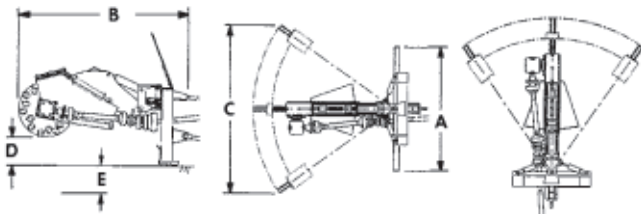

## FEATURES

- All functions controlled by the joystick buttons or FECON supplied controller.
- Grind out entire root balls with 26" diameter grinding wheel.
- Sweep left to right.
- Telescope 12".
- Tilt up and down.
- Severe-duty frame, wheel and drive components
- Backfill blade for filling the hole and leveling chips.

## FAST & EASY INSTALLATION

- Attach to the universal skidsteer mount.
- Plug in the high-flow lines, case drain, and low-flow lines on carriers equipped with them.
- Plug in the electrical pin connector.

## EASY CONTROLS

- Sweep left and right is controlled by the dogbone switch on top of the left joystick.
- Tilt up and down is controlled by the remaining two buttons on the left joystick.
- Extend or Telescope is controlled by the dog bone switch on the right joystick.
- FECON supplied controller for some carriers works all functions.



- Safety Is The Responsibility Of The Operator.
- Operators cab must be protected with both properly maintained 1/2" LEXAN® Glass (or equal) and Falling Object Protection.
- Always insure that your carrier manufactures safety features, including Falling Object Protection and Roll Over Protection, meet your job safety requirements.
- Specifications subject to change without notice.

LEXAN® is a registered trademark of General Electric Company.

